

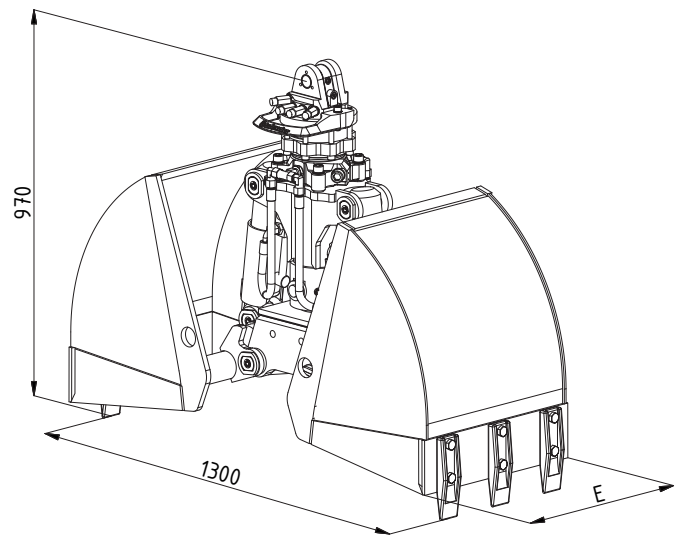


Series|DCS2

Excavator weight class: 5 - 9 t
Two-shell excavation grab

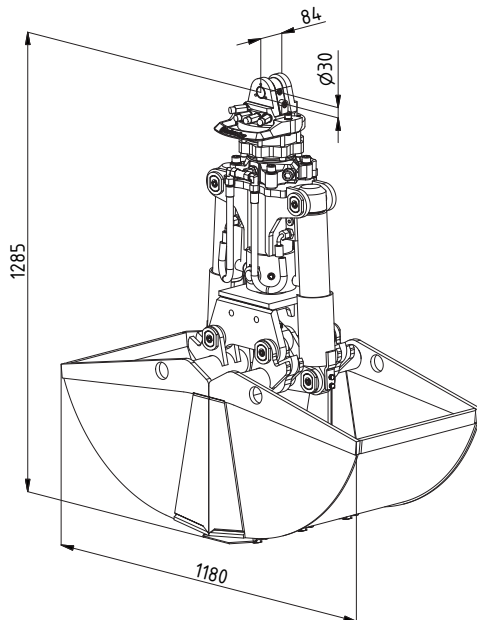

Type	Capacity SAE (l)	Weight (kg)	Cutting width E (mm)	Number of teeth
DCS2-270	90	250	270	3
DCS2-300	100	255	300	3
DCS2-400	135	270	400	3
DCS2-500	170	285	500	5
DCS2-600	205	300	600	5

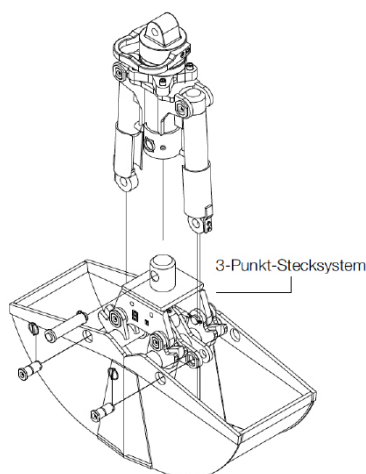


Technical specifications|DCS2

Excavator weight class:	t	5 - 9
Max. load bearing capacity	t	Grab: 2/rotary motor 4
Bulk weight up to	t/m ³	2
Max. operating pressure	bar	300 (gripping and slewing function)
Max. closing force	kN	20



|Use: Miniexcavator and truck loading crane

Multipurpose excavation grab for typical hydraulic excavator tasks such as excavation and digging natural soil, digging ditches and cable trenches, loading dirt, gravel and sand.

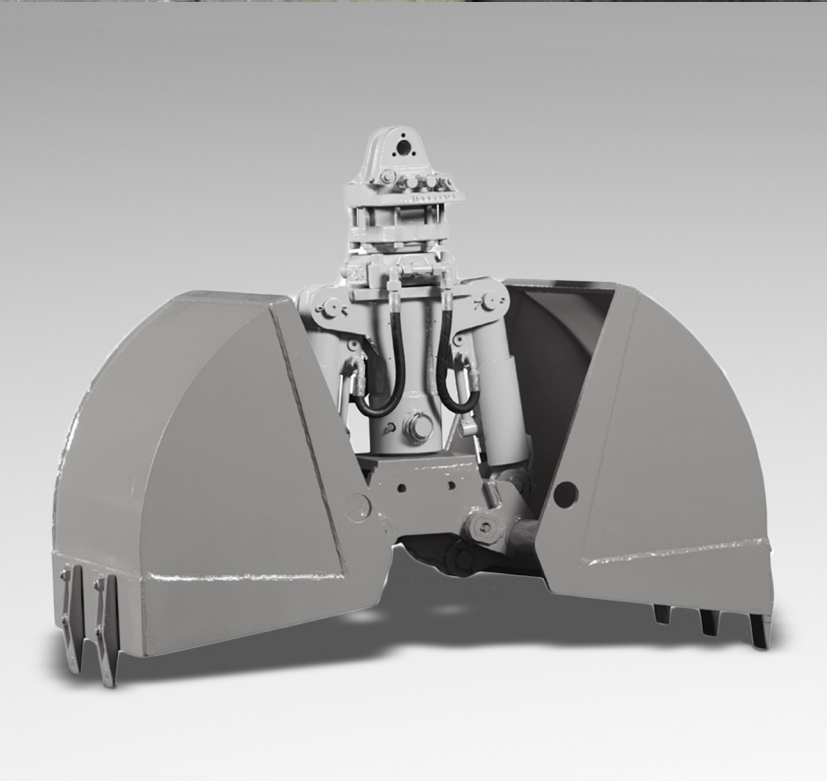

|Design features

- The shells and shell carriers are exchangeable with a 3-point plug-in system within the entire series
- Continuously rotatable hydraulic compact rotary motor
- Base and side edges made of high-strength fine-grain steel (HB 450)
- Forged 2-hole screw-on teeth
- Piston rod protection, hose hoop guard for the hydraulic connections on the rotary motor

|Available accessories and equipment

- Hose set and mounting for all known excavator manufacturers
- Mounting with pendular brake
- Ejector, grab extension
- Load hooks, bucket teeth
- Special shells according to customer specifications
- Additional special equipment upon request